


599

1. Drill holes in plastics 2 mm larger than the diameter of the bolts used. Use 7 bolts and washers for mounting.


2. When mounting make sure the distance between the upper left and upper right hole is approx. 83,5 cm. This ensures a well-placed grill.

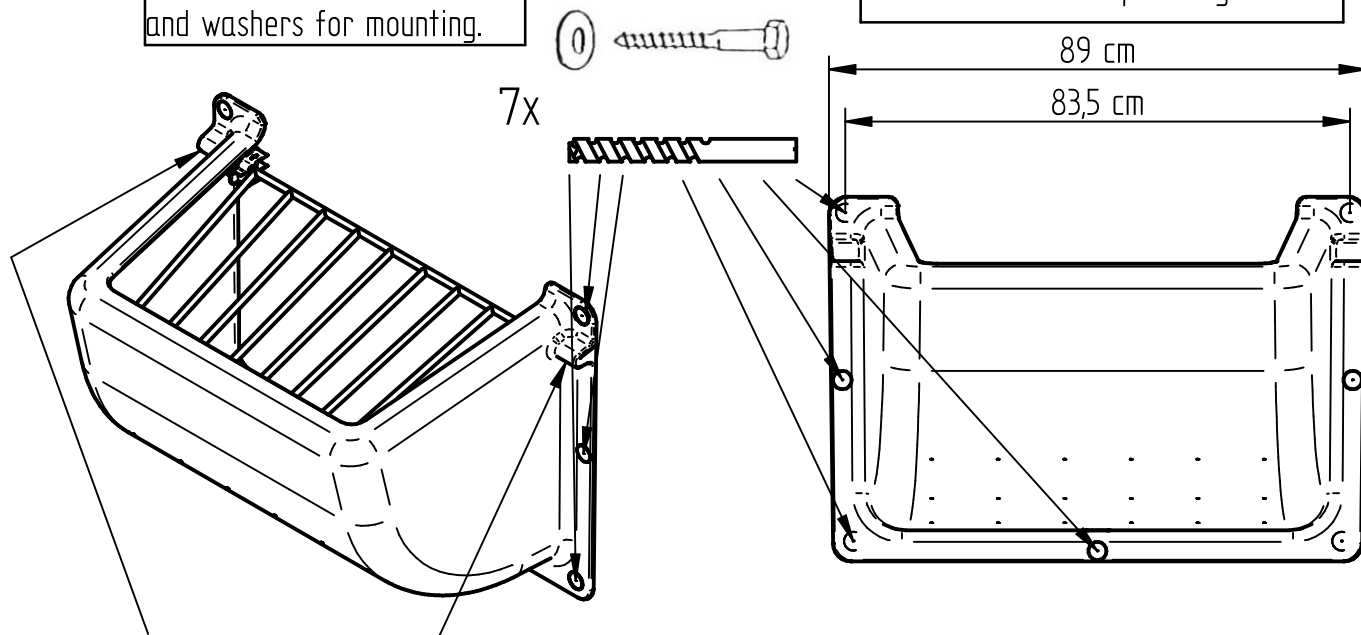

3. Place steel grill and locks in plastic sliding track of the feeder before mounting the feeder onto wall.

See also:

okplast.dk/produkt/slow-feeder-599/


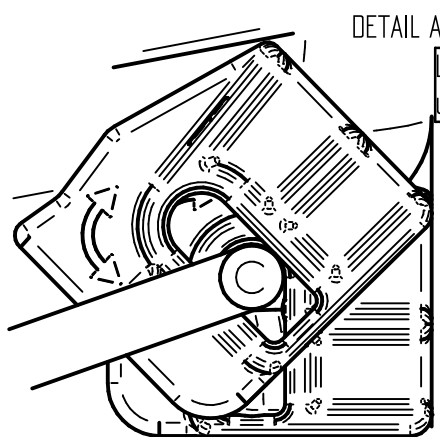


DETAIL A


Lift up and turn locks to unlock.

Now push grill backwards to open grill and fill slow feeder.


DETAIL B

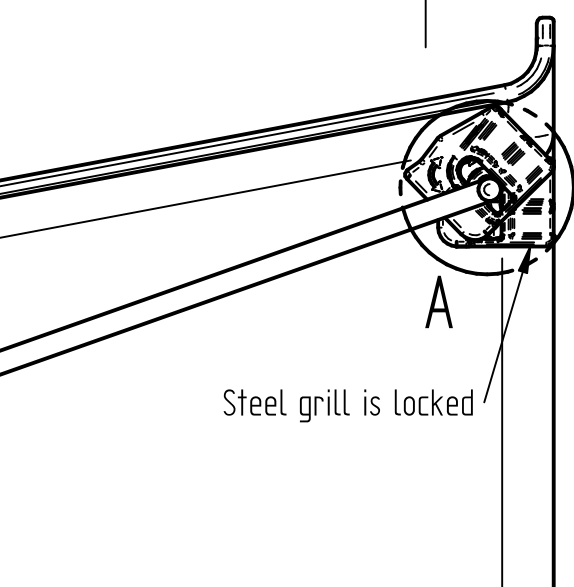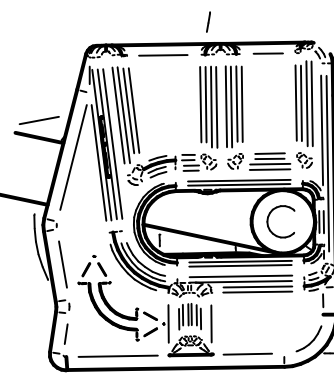

Steel grill is locked

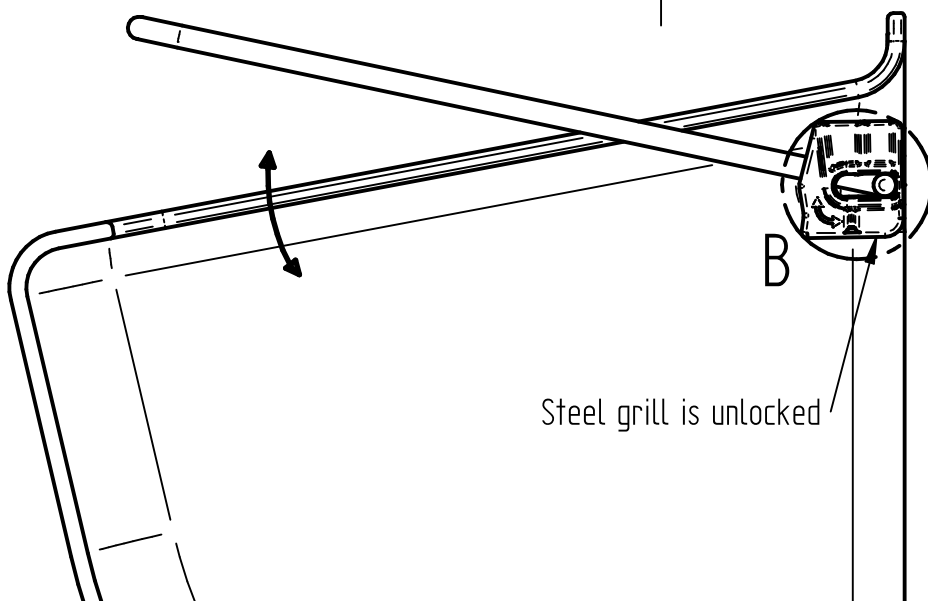

Steel grill is unlocked

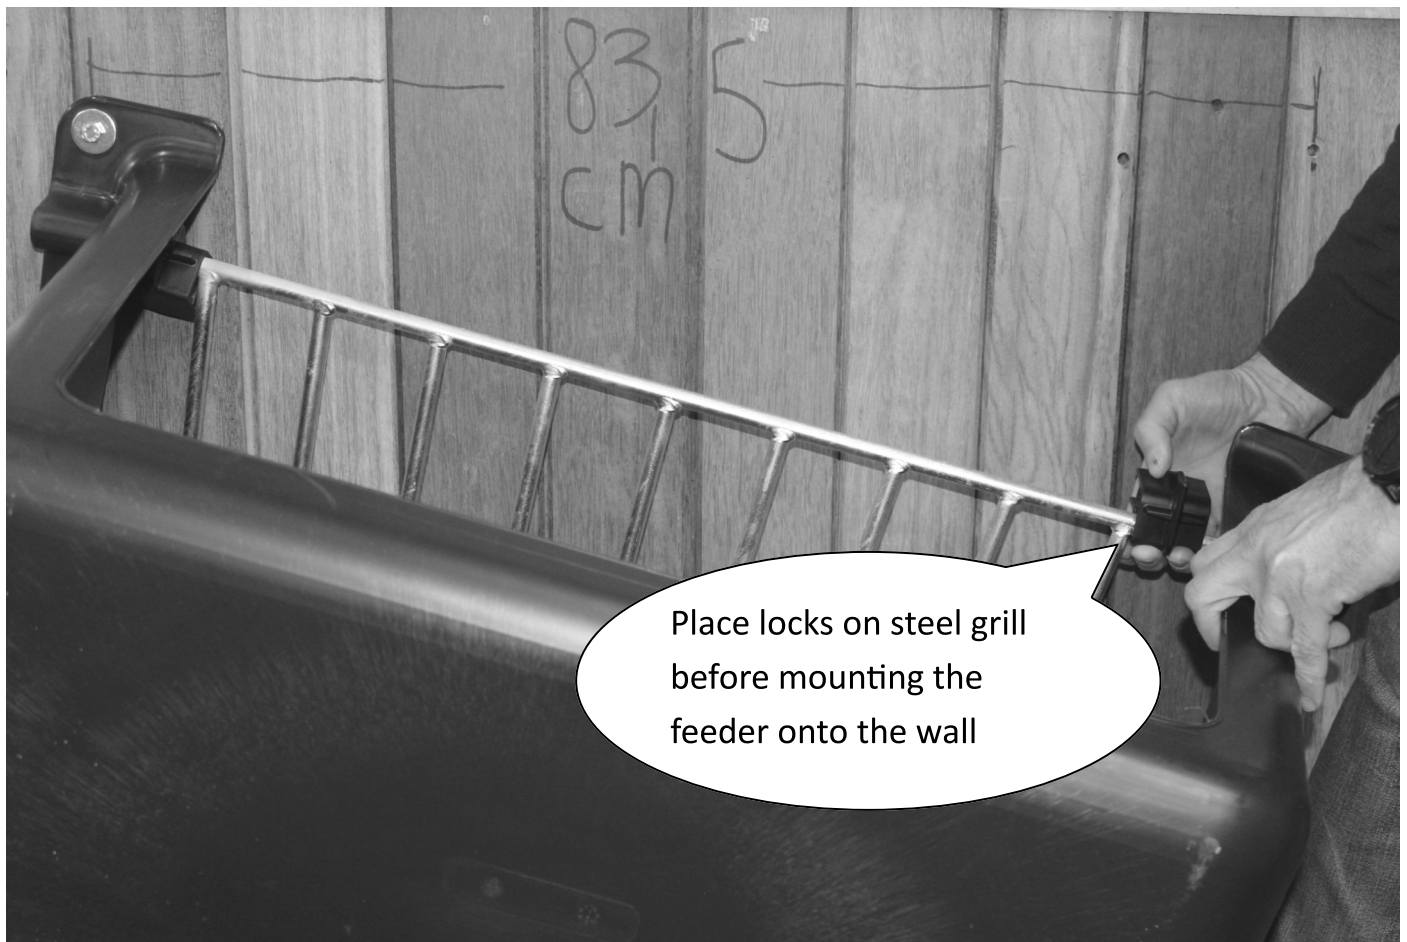

Push to reach a distance
of 83,5 cm between up-
per right and left bolts

